



Solar systems controller DX4201




The regulator DX4201 is designed for single-circuit solar thermal systems, which provides automatic control of pump operation, heat transfer medium through which a heat energy is transferred from the collectors to the storage.

The device measures a pair of temperature sensors temperature difference between collector and storage. Compares these temperatures and, when the temperature at the collector is higher than the set value on the stack (ΔT), and when the temperature in the tank is lower than the set temperature T , the pump turns on.

All device parameters are set by the service at Installation and operation is completely unattended.


Any failure of the device are indicated by a red LED diode, which in case of failure begins to blink.

- Unattended device
- Pump running indication
- Indication energy storage charge
- Automatic speed control of Pump
- Optimal use of solar energy

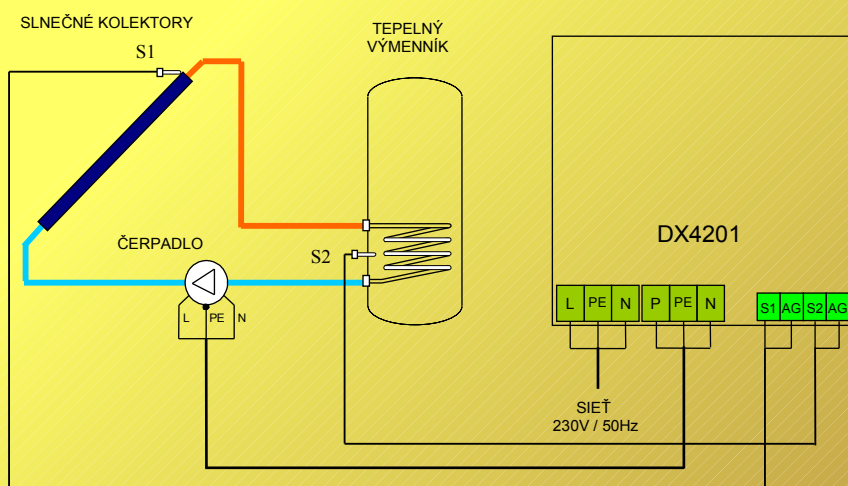

Technical data

| | |
|-------------------------------|-------------------|
| Supply voltage: | 230V/50Hz |
| Max. power input: | 230VA |
| Output voltage: | 230V |
| Max. output current: | 1A |
| Fuse: | T 2A/230V |
| Measurement range: | -25°C až 170°C |
| Temperature sensors: | DX1083, DX1112 |
| Adjustment range ΔT : | 1 až 18 K |
| Adjustment range T : | 10 až 90°C |
| Pipe protection: | 120°C |
| Operating temperature: | 0 až 50°C |
| Relative humidity: | max. 80% pri 30°C |
| Air pressure: | 70 až 106 kPa |
| Cover protection | IP20 |

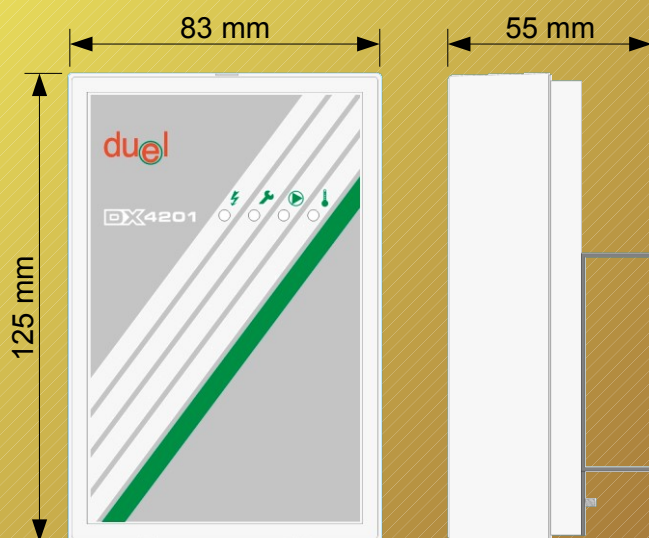

DUEL Námestovo s.r.o., Florinova 928/9, 029 01 Námestovo

tel: +421 43 5591092

fax: +421 43 5591091

duel@duel-ltd.sk

www.duel-ltd.sk